


Solenoid Valve YM-2W/YM-2WS


Product Features

- 1. The use of high-quality coils to ensure the reliability of the solenoid valve, suitable for long-time energised conditions.
- 2. The direct-acting diaphragm structure expands the range of applications and reliability of this series of products.
- 3. The use of direct-acting diaphragm structure without pressure to start, greatly expanding its field of use.
- 4. The use of flat diaphragm structure is reliable, and greatly enhance the service life of the product.
- 5. The use of direct-acting diaphragm structure is reliable, and greatly enhance the use of the product.

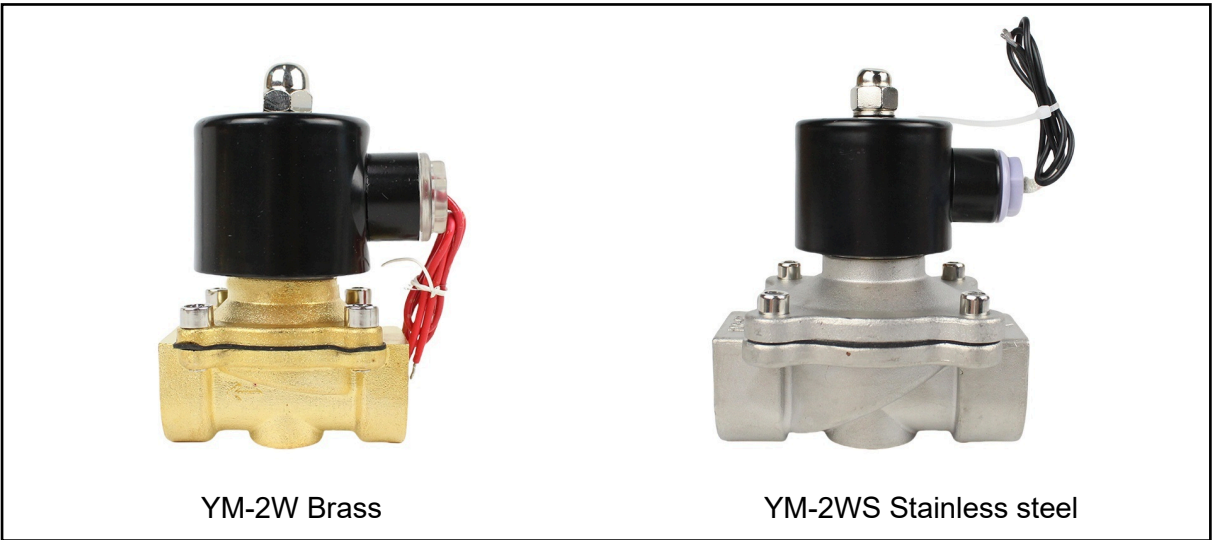

Parameters & Dimensions (mm)

Product Parameter									
Caliber	1/4"	3/8"		1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Torque	4mm	4mm	16mm	16mm	20mm	25mm	32mm	40mm	50mm
CV value	0.23	0.6	4.8	4.8	7.6	12	24	29	48
Applicable fluids	Air, water, oil, neutral gases and liquids								
Operating Voltage	AC220V、DC24V								
Operation model	Direct acting								
Type	Normally closed								
Material	Brass/Stainless steel								
Pressure	water、air: 0~1.0MPa oil: 0~0.7MPa								
Seal material	Standard: NBR Fluid temperature below 80℃								

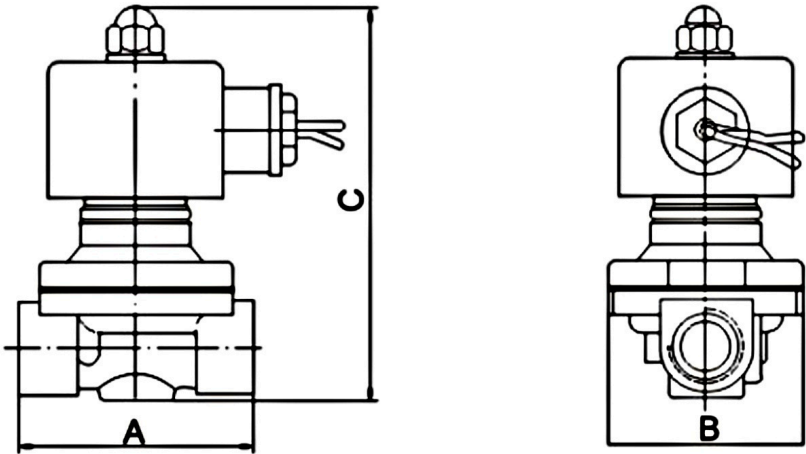

Model	Connection	Caliber	A	B	C
YM-2W	Screw	DN8	39	42	74
		DN10	62	55	102
		DN15	62	55	102
		DN20	67	55	113
		DN25	86	73	117
		DN32	90	77	130
		DN40	106	87	164
		DN50	123	83	176