


## Water Solenoid Valve YM2WUB-S/U

### Produit overview

Solenoid valve for water is made of PVC material, which is lighter than stainless steel solenoid valve for water and brass solenoid valve for water. There are threaded solenoid valves for water, flange solenoid valves for water, solenoid valves for water with a variety of connection methods. Plastic pipe with plastic PVC solenoid valve for water is becoming a development trend.

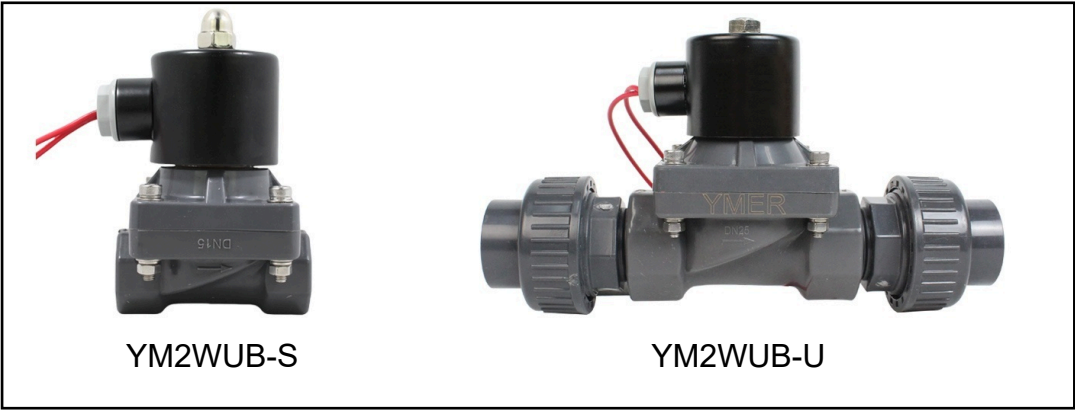

### Produit feature

- 1, water solenoid valve body material is in line with the drinking water standard plastic injection moulding, health and safety.
- 2, water solenoid valve can be compatible with plastic piping in addition to supporting the installation, can also be docked with a variety of metal piping.
- 3, water solenoid valve threaded and quick connection form, easy to install.

### Produit Model

| Model    | Connection   | Material |
|----------|--------------|----------|
| YM2WUB-S | Screw thread | UPVC     |
| YM2WUB-U | True union   | UPVC     |





Produit parameter

|                       |                                |     |    |    |    |
|-----------------------|--------------------------------|-----|----|----|----|
| Produit Model         | YM2WUB-S/U                     |     |    |    |    |
| Applicable medium     | Water                          |     |    |    |    |
| Caliber               | 15                             | 20  | 25 | 32 | 40 |
| Cv value              | 4.8                            | 7.6 | 12 | 24 | 29 |
| Pressure              | 0~1.0MPa                       |     |    |    |    |
| Compression Strength  | 1.2MPa                         |     |    |    |    |
| Operating Temperature | UPVC/ABS:-5~50℃ PP/PPR:-5~100℃ |     |    |    |    |
| Voltage               | ±10%                           |     |    |    |    |
| Body Material         | UPVC、ABS                       |     |    |    |    |
| Diaphragm Material    | NBR (EPDM or FKM customised)   |     |    |    |    |


Dimensions (mm)



YM2WUB-S

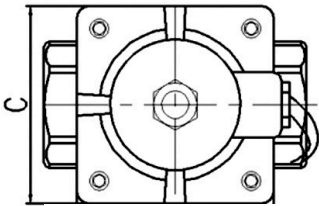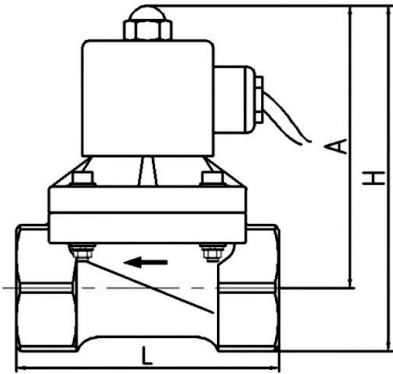

| Model                    | Caliber | L   | H   | C  | A   |
|--------------------------|---------|-----|-----|----|-----|
| YM2WUB-S<br>Screw thread | DN15    | 75  | 118 | 63 | 102 |
|                          | DN20    | 80  | 123 | 63 | 104 |
|                          | DN25    | 100 | 135 | 75 | 110 |
|                          | DN32    | 120 | 167 | 94 | 137 |
|                          | DN40    | 130 | 174 | 94 | 142 |

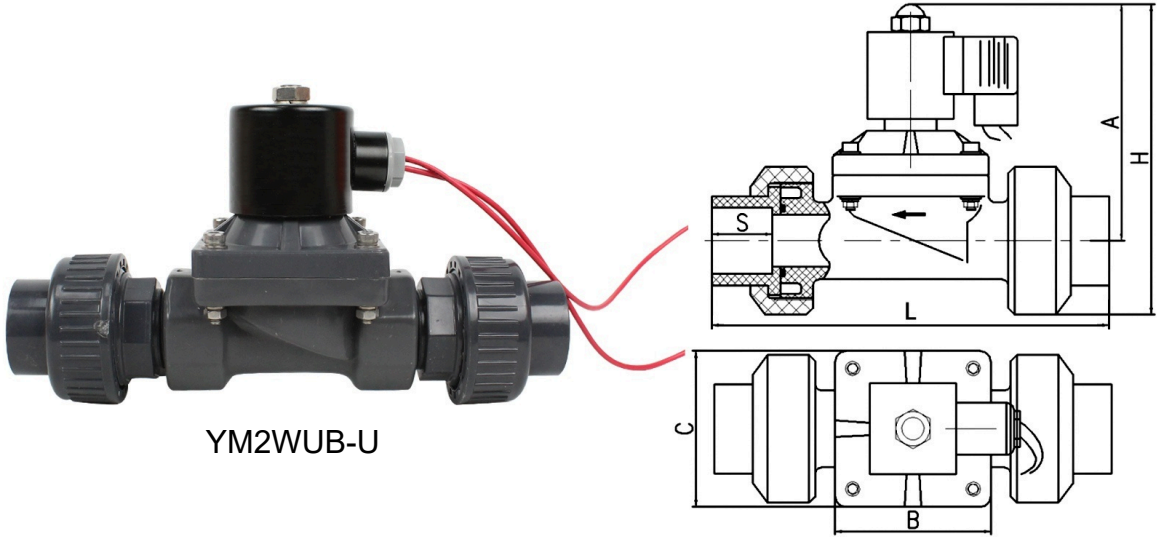

YM2WUB-U

| Model                  | Caliber | L   | H   | C  | A   | B  | S  |
|------------------------|---------|-----|-----|----|-----|----|----|
| YM2WUB-U<br>True Union | DN15    | 159 | 132 | 63 | 106 | 63 | 23 |
|                        | DN20    | 165 | 140 | 63 | 109 | 63 | 27 |
|                        | DN25    | 185 | 150 | 75 | 110 | 75 | 30 |
|                        | DN32    | 255 | 174 | 94 | 137 | 94 | 32 |
|                        | DN40    | 282 | 183 | 94 | 142 | 94 | 32 |