



Stainless Steel Pressure Reducing Valve RD-34




Product Overview

- Pressure reducing valves are suitable for: HVAC equipment, water purification systems, air compression systems, mechanical equipment and systems with corrosive media.
- Stable to maintain the set pressure of piping system, the valve is compact, lightweight and easy to adjust the pressure.

Parameters&Dimensions (mm)

Valve Parameters	
Product Model	Stainless Steel Pressure Reducing Valve RD-34
Valve Body Material	Stainless Steel 304
Nominal Size	15A (1/2") - 20A (3/4")
Applicable Media	Water, Oil, Air
Inlet Pressure	Max. 16 Bar
Reduced Pressure	1~6 Bar
Minimum differential pressure	1 Bar
Operation Temperature	FKM Seal: -20~180℃
Connection Method	BSP Threaded Connection
Installation Direction	Horizontal installation

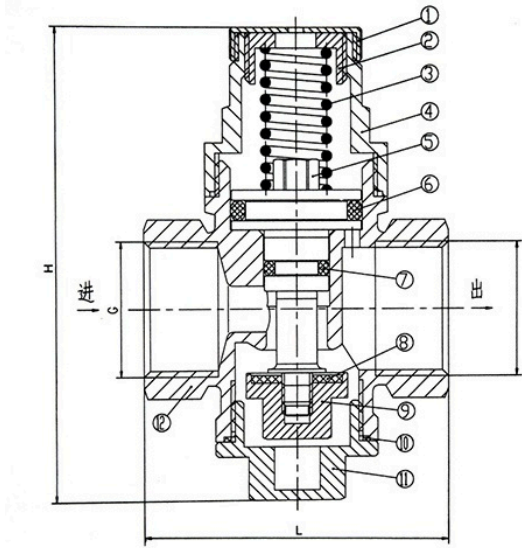



Caliber (mm)	L	H	D
1/2"	60.5	93	13
3/4"	61.5	93	19

No.	Name	L
1	Cover	SS304
2	Regulating screw	SS304
3	Spring	SS304
4	Valve cover	SS304
5	Piston	SS304
6	O-ring	FKM/EPDM
7	O-ring	FKM/EPDM
8	Valve clack	FKM/EPDM
9	Valve core	SS304
10	Gasket	PTFE
11	Plug	SS304
12	Valve body	SS304